



Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

## MODEL BM68S

### 2 Door Supreme Refrigerated Prep Table

#### Model Available

- BM68S** - 68" wide, 2 door prep table with raised rail and granite work top

## Refrigeration System

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) R404A refrigerant
- Evaporator coil & condenser balanced for low power consumption - holding the widest temperature range in its class and getting the best in food preservation
- Coolers adjustable from 28 to 46°F (-2°C to 8°C)
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design

## Construction

- Higher insulation rates thanks to high-tech environmentally friendly CFC free, cyclopentane foaming insulation. 5% of energy consumption savings guarantee if compared to other CFC free foams.
- Raised rail featuring gas pistons to keep the covers open
- Interior - attractive stainless steel Aisi304, ETL
- Coved corners or easy cleaning
- Stainless steel exterior and interior.
- Door extends full width of cabinet shell.
- Self closing hinged magnetic doors
- Magnetic gasket of one piece construction, removable without tools for ease of cleaning



## Standard Features

- Two heavy duty PVC coated wire 18" x 26" rack included
- Warranty: 1 year parts and labor, 5 year compressor


## Options & Accessories

(AT ADDITIONAL CHARGE)

- 18" x 26" stainless steel wire rack

SHORT FORM SPECIFICATIONS: Provide Marsal model BM68S refrigerated prep table. Unit shall feature CFC free, cyclopentane foaming insulation. Two doors extend the full width of the cabinet shell with self closing hinged magnet doors and a magnetic gasket that is removeable without tools. The unit includes a raised rail with self opening rail covers and a granite work top. The refrigeration system is a self-contained, CFC free, capillary tube sytem. The evaporator coil and condenser are balanced for low power consumption. Unit is adjustable from 28 to 46°F (-2°C to 8°C). Unit shall have sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design. Provide with eighteen month oven parts and one year labor warranty. Provide with options and accessories as indicated.

DIMENSIONS ARE IN INCHES [MM]

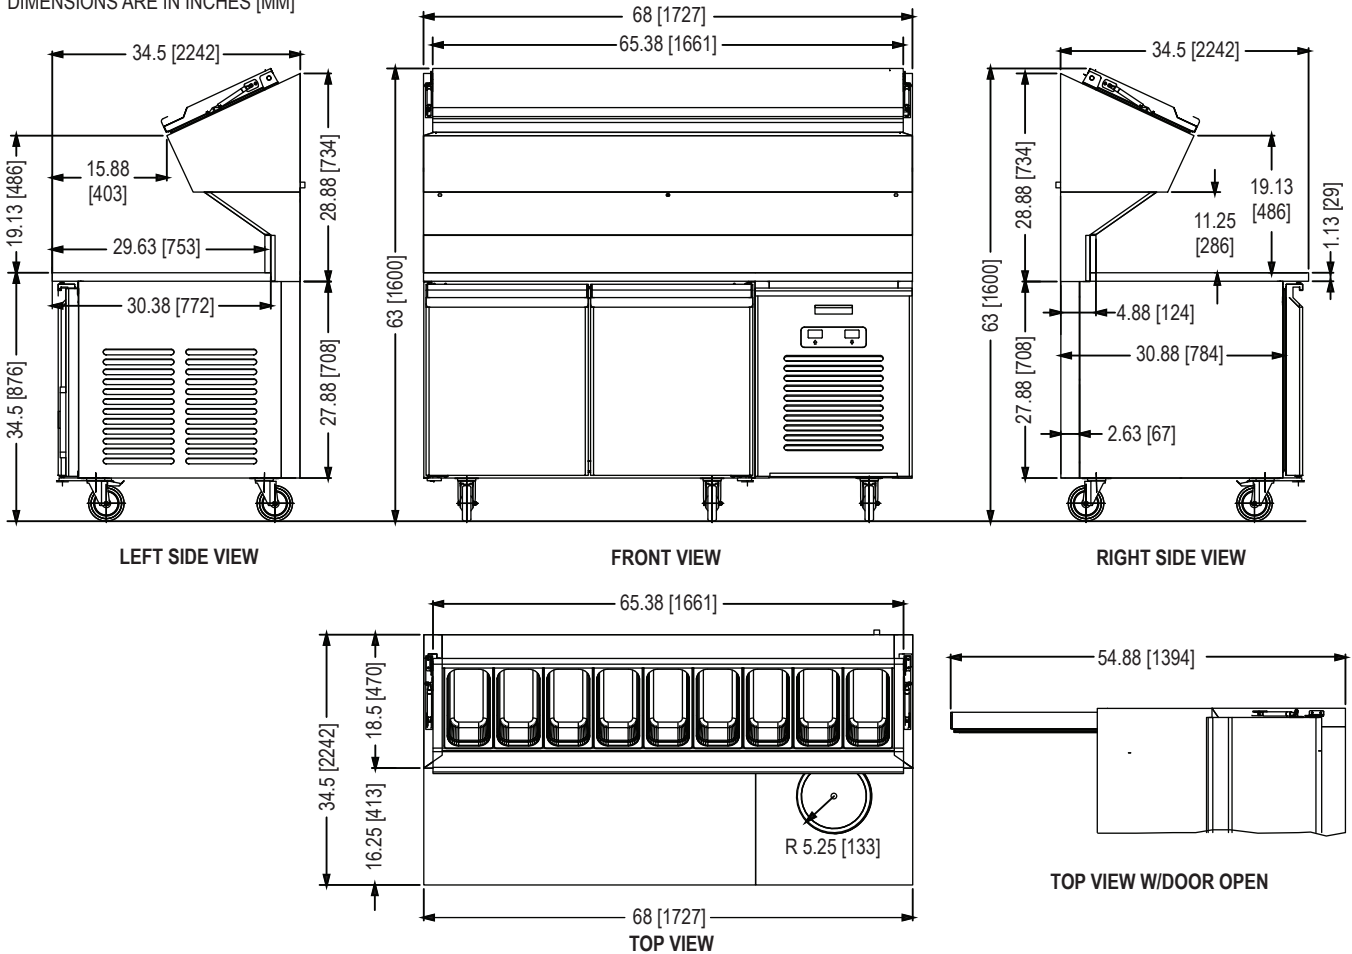

## Specifications

|                         |   |
|-------------------------|---|
| <b>Dimensions</b>       | 68" W x 34.5" D x 63" H (1727 x 876 x 1600 mm)                    |
| <b>Capacity</b>         | 14 cubic feet   |
| <b>Rack capacity*</b>   | Eight 18" x 26" racks   |
| <b>Electrical</b>       | 115 / 60Hz / 1Ph / 8 amp  |
| <b>Refrigerant type</b> | Environmentally friendly (CFC free) R404A                         |
| <b>Warranty</b>         | 1 year parts and labor, 4 additional year compressor (parts only) |
| <b>Shipping weight</b>  | 661 lbs (300 kg)  |

\* Ships with 2 racks, additional racks available as an accessory



Copyright 2017 Marsal . All designs and specifications presented in this document are subject to change without notice due to constant innovation.